

GreenworldTM

Quality Agriculture & Garden Products





11950

Generator :

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power : 650W

Engine :

*Fuel capacity: 4.2 L

*Induction motor:Cooper wire

*Single phase, 2 stroke

*Noise level: 69dB

*Max output power: 800w



112500

Gasoline generator

*Rated frequency: 220V/50HZ or 120V/60HZ

*Rated output power: 2.0KW

*Max output power:2.2KW

*Rated rotation speed: 3000RPM

*DC output: 12V/8A

*Phase : 3 phase

*Fuel tank: 15L

*Single cylinder,4 stroke,air-cooled,OHV,gasoline

*Compression atio: 8:5:1

*Induction motor:cooper wire



113500E

Gasoline generator

*Rated frequency: 220V/50HZ or 120V/60HZ

*Rated output power:2500W,

*Max output power: 2800W

*Electronic starting system

*Fuel capacity: 15L

*Induction motor:cooper wire

*Single phase, 4 stroke

*Noise level: 69dB

*Displacement: 196cc





11100

Gasoline generator

Generator

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power : 1000W

*Manual starting

Engine :

*Fuel capacity : 4.2 L

*Induction motor : Cooper wire

*Single phase, 2 stroke

*Noise level: 69dB

*Max output power: 1100w



11300E

Gasoline generator

Generator

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power:2500W,

*DC output: 12V 8A

Engine :

*Single phase, single cylinder ,

*Rated speed :3000 r/min, Fuel capacity:15L,

*Displacement (cm3): 196,

*Fuel: Gasoline Single Phase

*Electric starter with 10AH battery

Single cylinder, 4-stroke, OHV, gasoline engine.



11013E

Gasoline generator

Generator:

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power : 5500W

Engine:

*Ignition system: Transistor magneto

*Starting system: Electronic


*Displacement: 389cc

*Fuel capacity: 25L

*Induction motor: cooper wire

*Engine oil system capacity: 1.1L

*4-stroke, Noise level: 76dB

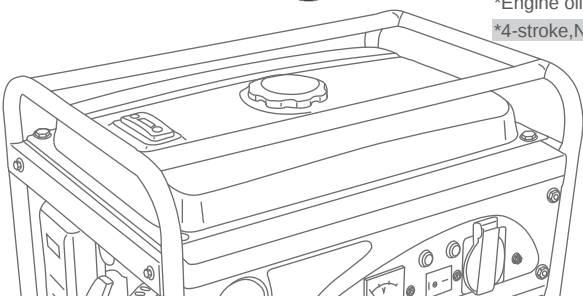



11135

4 stroke gasoline brush cutter

*Engine type: 4- stroke, 1 cylinder

*Displacement: 35.8 CM3(2.18 CU-IN)

*Bore x Stroke : 39*30mm

*Max output: 1 kw/7,000rpm

*Max rotation with no load: 10,000rpm

*Fuel consumption : 360g/k Wh(265/PSh)

*Accessory : 3 teeth grass cutting blade,tool kit



11108

*Engine : 1E34F-7A

*Displacement : 25.4ML

Power: 0.75kW/7500rpm

*Net weight : 5.9kg

*Engine : 1E36F-7A

*Displacement : 32.6ML

Power : 0.9kW/6500rpm

*Net weight : 6.8kg

*Engine: 1E40F-7A

*Displacement : 42.7ML

Power : 1.25kW/6500rpm

*Net weight : 7.9kg

*Engine : 1E44F-7A

*Displacement : 51.7ML

Power : 1.4 kW/6500rpm

*Net weight : 7.9kg





11103

2 stroke gasoline brush cutter

*Engine displacement : 42.7CC

*CuttingWith : 415mm

*Blade Length : 255mm

*Engine : 1E40F- 5A

*Power : 1.25kw

*R/M : 6500 RPM

*N. W. : 7.5kgs

*Certificate : GS/CE



11100

2 stroke gasoline brush cutter

*Engine model : 1E34F

*Carburetor : Diaphragm type

*Power : 0.85kw/7000r/min

*Displacement : 25.4cc

*Blade : 3tooth metal and nylon

*Fuel tank capacity : 0.7L

*Approval : CE

*Remark :

1PC 3T CUTTER BLADE, AND 1PC NYLON
CUTTER HEAD INCLUDED





11201

Nylon Trimmer Head "Tap-n-go"

*Material : PA6

*With 1PC 2.4MMX2.5M Round Trimmer line

*Packing: Each polybag+label

*Size of mater box : 38X38X33CM

*Qty/Master box : 36pcs

*Net weight: 14/13kg



11202

Manual Nylon Trimmer Head

*Material : PA6

*With 1PC 2.4MMX2.5M Round Trimmer line

*Packing: Each polybag+label

*Size of mater box : 38X38X33CM

*Qty/Master box : 60pcs

*Net weight: 18/17kg



11203

TAP-N-GO Trimmer head

*Material : PA6

*With 1PC 2.4MMX2.5M Round Trimmer line

Easy loading of the cord cassette with Easy Load System

*To fit as brush cutters frpm 33 cc

*Bolt- less assembly



11208

Manual Nylon Trimmer Head

*Double line, for cutting and thinning.

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.



11210

Nylon Trimmer Head "Tap-n-go"

*Material : PA6

*With 1PC 2.4MMX2.5M Round Trimmer line

*Packing: Each polybag+label

*Size of mater box : 49X37X27CM

*Qty/Master box : 40pcs

*Net weight: 18/16kg



11218

Manual Nylon Trimmer Head

*Double line, for cutting and thinning.

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.

11205-A

Manual Nylon Trimmer Head

*Double line, for cutting and thinning.

*The nylon line is fed by tapping the cutting head on the ground.

*With 1 PC 2.4mmX2.5m round trimmer line

*Manual trimmer head(semi-automatic type)

* Knob can be Line knob



11205-B

Manual Nylon Trimmer Head

*Double line, for cutting and thinning.

*The nylon line is fed by tapping the cutting head on the ground.

*With 1 PC 2.4mmX2.5m round trimmer line

*Manual trimmer head(semi-automatic type)

*Triangle knob



11212

Material: 30% Nylon PA6

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.

*Female thread : M10 X 1.25 or M8X1.25

*With 1PC 2.4MM*2.0M round trimmer line

*Net Weight: 430g



11213

Material: 30% Nylon PA6

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.

*Female thread :M8X1.25

*With 1PC 2.4MM*2.0M round trimmer line

*Net Weight: 480g



11214

Material: 30% Nylon PA6

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.

*Female thread : M10 X 1.25 or M8X1.25

*With 1PC 2.4MM*2.0M round trimmer line

*Net Weight: 430g





11215

Manual Nylon Trimmer Head

Nylon PA6 line, whips trimmer line

*With 2PCS 2.4MM X 30CM round line

*Net weight : 130g



11216

TAP-N-GO Trimmer head

Easy line refilling without disassembling any part of the trimmer head

With 2.4MMX2.5M trimmer line



11217

TAP-N-GO Trimmer head

*with 1 PC 2.4mmX2.5m round trimmer line

11218

Automatic trimmer head

*Material : Nylon PA6 + Aluminum button

*Easy loading of the cord cassette with Easy load system

*Thread the cord completely and spool on with alumin push button

*Semi- automatic trimmer head professional(Tap'n Go technology

*To fit as brush cutters from 33 cc

*Max. cord capacity : 5 M2 of cord - 2.4mm

*Bolt-less assembly



11219

Aluminum fix line head

*8 PCS fixed line, whips trimmer head

*Material: aluminum



11220

Aluminum fix line head


*centering bore for both 20-254.4mm.

***Delivered complete with:** 4 nylon whips of 3.0mm and length:300mm each

*Suggested for brushcutter over 33cc

*Easier assembling and disassembling

*Larger metal knob for more comfortable assembling and dis

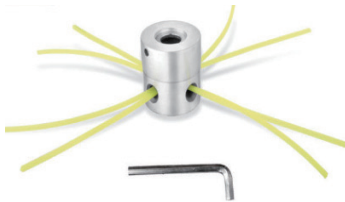

11221

Aluminum fix line head

*With 4 PCS 3 mm * 30cm square trimmer line,

metal knob:80mm



11222

Whips trimmer head, fixed line

Aluminum material, Chrome plated



11223

Aluminum chain trimmer head

*Applicable on every type of brush cutter for the crushing, the deforestation and cut of grass and small shrubs and large cut.

It concurs however optimal performances for particularly heavy and professional jobs

***Accessory:** body, ring, chain, press board, screw, pin, pin cap



11224

Whips trimmer head, fixed line

Aluminum material, Chrome plated

Net weight :200g





11225

*Aluminum fix line head

*Upper bolt :Nylon

*centering bore for both 20-254.4mm.

*Delivered complete with: 4 nylon whips of 3.0mm and length:300mm each

*Suggested for brushcutter over 33cc

*Easier assembling and disassembling

*Larger metal knob for more comfortable assembling and dis



11226

Steel fixed line,whips trimmer line head

*With 2PCS 2.4MM X 30CM round line

*Net weight :180g



11227

Material: 30% Nylon PA6

*The nylon line is fed by tapping the cutting head on the ground.

*Comes standard on many trimmers

*Adaptor bolts available to fit most of brush cutter.

*Female thread : M10 X 1.25 or M8X1.25

*With 1PC 2.4MM*2.0M round trimmer line

*Net Weight: 330g





11301

2 Stroke Earth auger

*Matched engine : 1E40F-5AG

*Displacement : 42.7CC

*Standard power : 1.25KW/6500 RPM

*Carburetor: diaphragm

*Mixed fuel ratio : 25:1 - 50:1

*Tank capacity : 0.98L

*Blade length : 30/60/80/100/150/200CM



11302

2 Stroke Earth auger

*Matched engine : 1E48F

*Displacement : 51.7CC

*Standard power : 1.46KW/6500 RPM

*Carburetor: diaphragm

*Mixed fuel ratio : 25:1 - 50:1

*Tank capacity : 0.98L

*N.W : 9.8KG

*Engine packing dimension : 55 X 33.5 X 39.5 CM

Overall package dimension : 76 X 48 X 41 CM



11303

Generator:

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power : 5500W

Engine:

*Ignition system: Transistor magneto

*Starting system: Electronic

*Displacement: 389cc

*Fuel capacity: 25L

*Induction motor: cooper wire

*Engine oil system capacity: 1.1L

*4-stroke, Noise level: 76dB



11063

Generator:

*Rated frequency : 220V~50HZ / 120V~60HZ

*Rated output power : 5500W

Engine:

*Ignition system: Transistor magneto

*Starting system: Electronic

*Displacement: 389cc

*Fuel capacity: 25L

*Induction motor: cooper wire

*Engine oil system capacity: 1.1L

*4-stroke, Noise level: 76dB



11249

Gasoline Mist Duster

*Engine : 1E40F-3Z

*Engine type : 2 stroke

*Container : 14L

*Power : 1.83kw,6500rpm

*Fuel tank : 1.3L

*Range : ≥ 12 m

*Net weight : 10.5kg

*Package dimension : 510 x 390 x 680 mm



11250

Gasoline Mist Duster

Container Capacity 14LT,

Fuel Tank Capacity: 1.3l

N.w.: 11kgs

Range(m): ≥ 12

Engine: 1E40FP-3Z

Power: 2.13kw

r/m: 7500



11251

Gasoline Mist Duster

*Engine: 1E34F

*Container : 20L

*Fuel tank : 0.75L

*Power : 0.75 kw / 7500rpm

*Net weight : 8.5kg

*Package dimension : 430 x 340 x 660 mm3



11252

Gasoline Blower

*Average Air Volume(m3/s):0.3

*Net weight: 11kg

*Discharging capacity(ml):63.3

*Mating power: 1E48FP

*Power: 2.7/6800 kW/r/min

*Packing dimension: 52 X 39 X 57



11270

Gasoline Blower

*Average Air Volume(m³/s): 0.13

*N.W.: 4.3kgs

*Discharging Capacity: 25.4CC

*Engine : 1E34FB

*Power : 0.75kw ,r/m: 7500

*Packing dimension : 40 X 26 X 35



11273

Gasoline Blower

Engine: 1E34F

*Engine type : 2 stroke,air cooled

*Displacement : 25.4 ml

*Power : 0.75kw, 7500RPM

*Idle speed : 2800±200

*Noise : ≤ 108 dBA

*Spark plug : L6

*Fue mix ratio: 25:1 ~ 50:1

*Fuel tank capacity: 0.45 L

*Air velocity : ≥ 41 m/s

*Air volume : ≥ 0.2 m³/s

*Net weight : 5.8kg

*Accessory included : Round nozzle,Mini flat nozzle,Curved flat nozzle,One-hand operation



11272

Gasoline Blower

Engine: 1E34F

*Engine type: 2 stroke,air cooled

*Displacement: 25.4 ml

*Power : 0.75kw, 7500RPM

*Idle speed : 2800±200

*Noise : ≤ 108 dBA

*Spark plug : L6

*Fue mix ratio: 25:1 ~ 50:1

*Fuel tank capacity: 0.45 L

*Air velocity: ≥ 41 m/s

*Air volume : ≥ 0.2 m³/s

*Net weight: 4.5kg

*Accessory included : Round nozzle,Mini flat nozzle,Curved flat nozzle,One-hand operation



11274

Gasoline Blower

Engine : 1E34F

*Engine type : 2 stroke,air cooled

*Displacement: 63.3 ml

*Power : 0.75kw, 7500RPM

*Idle speed : 2800±200

*Noise : ≤ 108 dBA

*Spark plug : L6

*Fue mix ratio : 25:1 ~ 50:1

*Fuel tank capacity : 0.45 L

*Air velocity : ≥ 41 m/s

*Air volume : ≥ 0.2 m³/s

*Net weight : 5.8kg

*Accessory included : Round nozzle,Mini flat nozzle,Curved flat nozzle,One-hand operation



Rotatable handle
The handle can be rotated within scope of 180 degree and ensures comfortable operation.

11301

Gasoline hedge trimmer

*Engine : 1E32FL

*Displacement : 22.5 ml

*Power : 0.65kw / 7500 rpm

*Net weight : 6.5 kg

*Cutting width : 750mm

*Scissor type : Dual back & forth

*Packing dimension : 1210 x 230 x 270 mm3



11302

Gasoline hedge trimmer

*Engine : 1E34FL

*Displacement : 25.4 ml

*Power : 0.75kw / 7500 rpm

*Net weight : 8.5 kg

*Cutting width : 600mm

*Scissor type : Dual back & forth

*Packing dimension : 1228 x 260 x 230 mm3



11303

Gasoline hedge trimmer

*Engine : 1E34FL

*Displacement : 25.4 ml


*Power : 0.75kw / 7500 rpm

*Net weight : 8.5 kg

*Cutting width : 600mm

*Scissor type : Dual back & forth

*Packing dimension : 1228 x 260 x 230 mm3

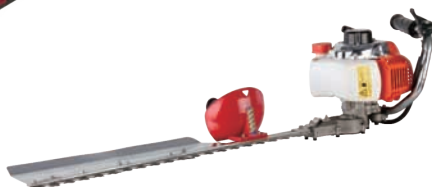

11304

Gasoline hedge trimmer

*Engine : 1E32FL

*Displacement : 22.5 ml

*Power : 0.65kw / 7500 rpm

*Net weight : 6.5 kg

*Cutting width : 750mm

*Scissor type : Dual back & forth

*Packing dimension : 1210 x 230 x 270 mm3



11600



11600-B

MINI TILER

*Engine Model: 1P65F

*Displacement: 138ML

*Max power: 5HP

*Noise Level: 94DB

*Cutting Width: 300mm

*Certificate: GS/CE

MINI TILER

SIZE: 680X560X685MM

N.W.: 30kgs

Cutting Width: 400-500mm

Cutting Depth: 100-200mm

Engine Model: 1P64F

Displacement: 135ML

Max power: 5HP(3.7KW)/3,600rpm





For General Information:

江苏国泰国际集团华泰进出口有限公司

JIANGSU GUOTAI INT'L GROUP HUATAI IMP.&EXP. CO.,LTD

地址：江苏省，张家港市，人民路，华昌东方广场，15-16层

ADD:15-16F, HUACHANG ORIENTAL PLAZA, RENMIN ROAD,
ZHANGJIAGANG CITY, JIANGSU PROV. CHINA

TEL:0086-512-58696069,58696068, FAX:0086-512-58696937

www.toolchina.com